
**LVT-ID025**

**P2.5 mm, 320 mm x 160 mm, Indoor LED**

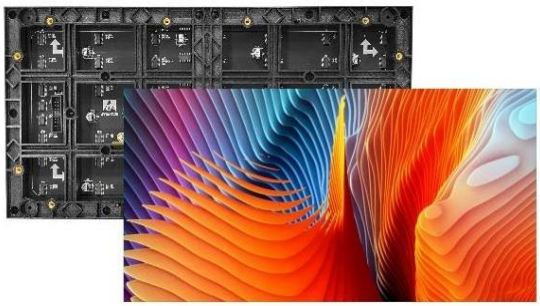

- Supports seamless image stitching in any direction, size and shape and displays stitched images uniformly and consistently without black lines
- Uses the ultra-high refresh rate to display delicate and smooth video images
- Uses the broadcast grayscale processing to show more image details
- High brightness and high contrast

+91 98929 86601 / +91 88501 57360
sales@lumivistatechnologies.com | lumivista.tech@gmail.com
www.lumivistatechnologies.com


- **Specification**

| Model | | LVT-ID025 |
|---|---|---|
| **Product Model** | Product Model | LVT-ID025 |
| **Module** | Pixel Configuration | SMD Triad LED |
| | Pixel Pitch | 2.5 mm |
| | Pixel Pitch Category | P2.5 |
| | Lamp Bead Dimensions | 2121 |
| | Dimensions (W × H × D) | 320 mm × 160 mm × 16.6 mm (12.60 '' × 6.30 '' × 0.65 '') |
| | Module Resolution | 128 × 64 |
| | Pixel Density | 160000 |
| | Signal Source Interface | HUB75E |
| **Display** | White Balance Brightness | 550 nits-600nits |
| | Color Temperature | 3000K to 10000K adjustable |
| | Viewing Angle | 160°(H)/160°(V) |
| | Brightness Uniformity | ≥ 97% |
| | Color Uniformity | ≤ ± 0.003Cx, Cy |
| | Contrast Ratio | 3000:1 |
| | Refresh Rate | 3840 Hz |
| **Processing Performance** | Scanning Amount | 43 |
| | Grey Level | Up to 16 bit |
| **Power** | Max. Consumption | ≤ 420 W/m |
| | Average Consumption | < 180 W/m2 |
| | Input Voltage | DC: 4.5 V to 5 V |
| **General** | Package Dimensions (WHD) | 673 (W) mm × 453 (H) mm × 390 (D) mm (26.50'' × 17.83'' × 15.35'') (40 cabinets in 1 box) |
| | Packing List | Several LED lamp beads and IC components Several signal cables and power cables |
| | Gross Weight | 20 kg (4.41 lb) |
| | Net Weight | 16 kg (3.53 lb) |
| **Working Environment** | Working Temperature | -10 °C to 40 °C (14 °F to 104 °F) |
| | Working Humidity | 10% RH to 80% RH (without condensation) |
| | Storage Temperature | -20 °C to 60 °C (-4 °F to 140 °F) |
| | Storage Humidity | 10% RH to 85% RH (without condensation) |

- **Available Model**

  LVT-ID025

  - **Dimension**

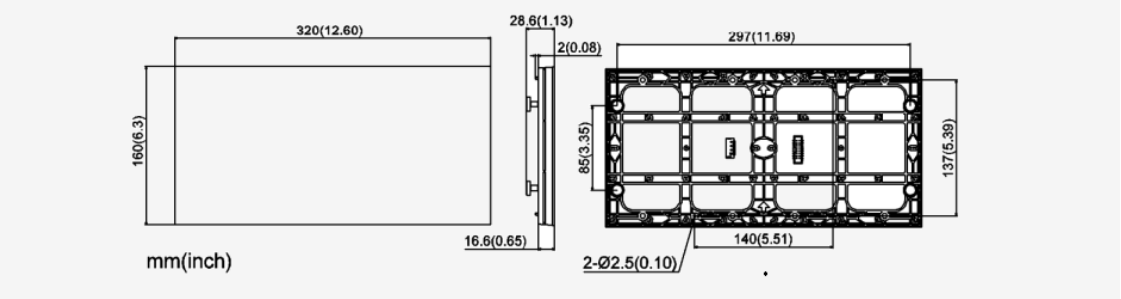


+91 98929 86601 / +91 88501 57360
sales@lumivistatechnologies.com | lumivista.tech@gmail.com
www.lumivistatechnologies.com