
LUMIVISTA
ACTIVE LED DISPLAYS

## LVT-OD060

## Outdoor, 6.0 mm, 320 mm x 160 mm, 3840 Hz

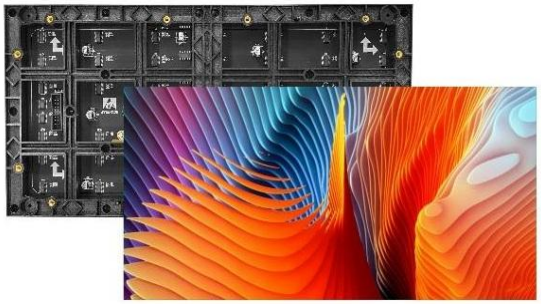

- Supports seamless image stitching in any direction, size and shape and displays stitched images uniformly and consistently without black lines
- Uses the ultra-high refresh rate to display delicate and smooth video images
- Support IP65
- High brightness and high contrast

+91 98929 86601 / +91 88501 57360
sales@lumivistatechnologies.com | lumivista.tech@gmail.com
www.lumivistatechnologies.com


- **Specification**

| Model | | LVT-ID060 |
|---|---|---|
| **Cabinet** | Pixel Configuration | 1R1G1B |
| | Pixel Pitch | P6 |
| | Dimensions (W × H × D) | 320 mm × 160 mm × 18 mm (12.60'' × 6.30'' × 0.71'') |
| | Resolution | 48 × 24 |
| | Pixel Density | 22500 dots/m² |
| | Lamp Board Housing | With housing |
| | Maintenance Method | Back maintenance |
| | Cabinet Flatness | 0.2 mm |
| | Protection Level | IP65 (Front) |
| **Key Material** | Lamp Encapsulation | 2727 |
| | Control System | DS-D42C08-H<br>DS-D42C16-H |
| **Display** | White Balance Brightness | 4500 nits |
| | Color Temperature | 2000 K to 14000 K adjustable |
| | Viewing Angle | Horizontal 140°, vertical 120° |
| | Brightness Uniformity | ≥ 97% |
| | Color Uniformity | ≤ ± 0.003Cx, Cy |
| | Contrast Ratio | ≥ 5000:1 |
| **Processing Performance** | Driving Method | Constant current driving |
| | Frame Frequency | 60 Hz |
| | Refresh Rate | Up to 3840 Hz |
| | Grey Level | Up to 14 bit |
| **Power** | Max. Consumption | ≤ 500 W/m² (4500nits) |
| | Average Consumption | ≤ 170 W/m² (4500nits) |
| | Power Supply | 110 to 220 VAC ± 15% |
| **General** | Package Dimensions (WHD) | 634 (W) mm × 410 (H) mm × 380 (D) mm (25'' × 16'' × 15'') |
| | Net Weight | 22450 g (40 pcs in 1) |
| **Working Environment** | Working Temperature | -20 °C to 50 °C (-4 °F to 120 °F) |
| | Working Humidity | 10% RH to 80% RH |
| | Storage Temperature | -20 °C to 60 °C (-4 °F to 140 °F) |
| | Storage Humidity | 10% RH to 90% RH |

- **Available Model**

  LVT-OD060

- **Dimension**

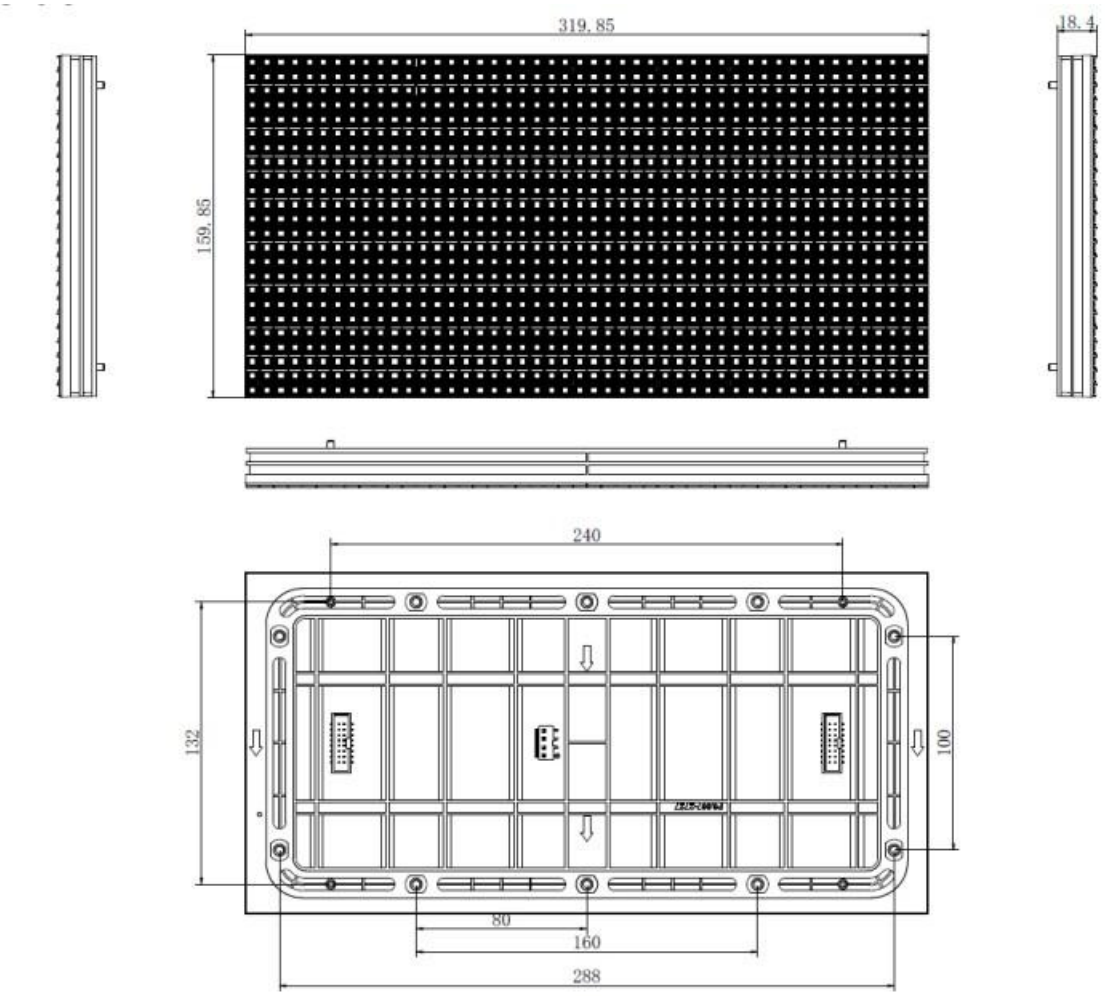


+91 98929 86601 / +91 88501 57360
sales@lumivistatechnologies.com | lumivista.tech@gmail.com
www.lumivistatechnologies.com